

# ER14505M

## 3.6V Primary Lithium Thionyl Chloride High Power AA-size Spiral wound

### Characteristics

- High energy density
- High and stable operating voltage during most of the lifetime in the application
- Wide range of operating temperature (-55°C~+85°C)
- Long operating time
- Low self-discharge rate (less than 1% after 1 year of storage)
- Long storage life (over 10 years under normal room temperature)

### Main Applications

- Utility metering
- Automatic meter reading
- Memory back-up
- Automotive electronics
- Alarm systems
- Industrial applications

### Electrical Specifications

(23±2°C)

Nominal capacity (10mA~2V):	1.8Ah
Rated voltage:	3.6V
Max constant current of discharge:	500mA
Max discharge current(pulse):	1000mA
Operating temperature range:	-55°C ~ +85°C

 U.L. Component Recognition MH 49177

### Physical Specifications

Diameter(max.)	14.5mm
Height(max.)	50.5mm
Weight(max.)	22g

### Available terminations

S:Standard termination


T:Solder tabs

P:Axial pins

Special terminations are available upon request.

MSDS is available upon request.

# ER14505M

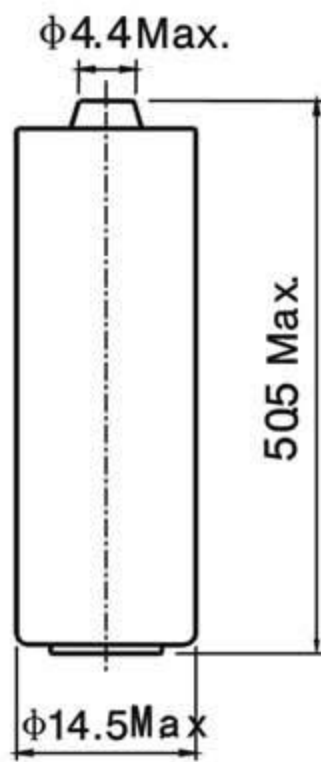


S: Standard termination


### Warning

- Fire, explosion and burn hazard
- Do not recharge, short circuit, crush, disassemble, heat above 100°C, incinerate
- Do not use the battery beyond the permitted temperature range

### Discharge Characteristics at 23±2°C

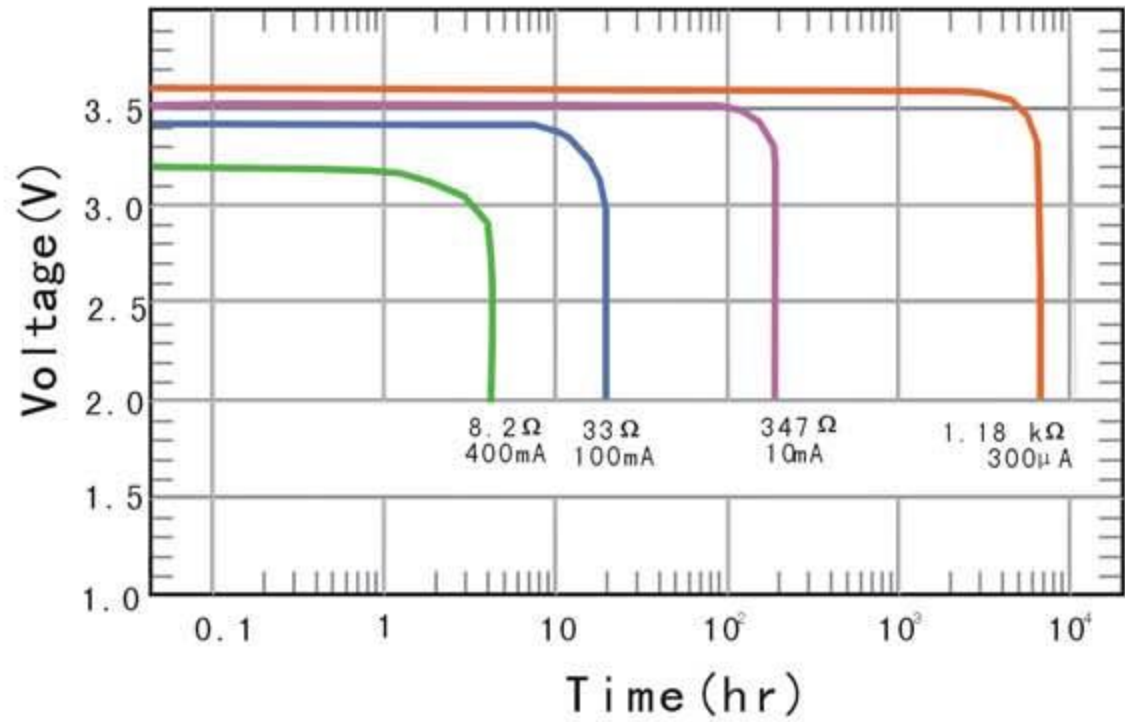

### Capacity VS. Current

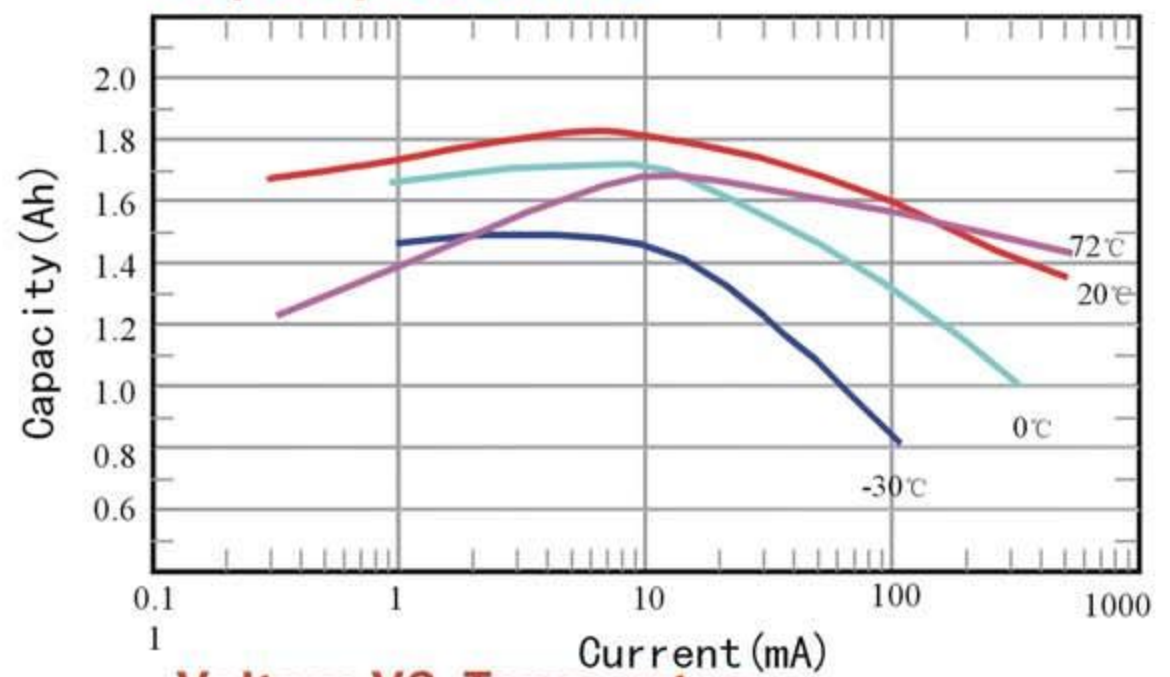

### Voltage VS. Temperature

