


SPECIFICATIONS (Typical values stored at 20°C for one year)

- **Nominal capacity** **0.8Ah**
(at 0.6mA/85°C/185°F/2.0V cut-off)
- **Nominal voltage** **3.6V**
- **Max. recommended continuous current** **10mA**
- **Operating temperature range** **-55 ~ +130°C**
- **Lithium metal content** **approx. 0.3g**
- **Weight** **9g**
- **Volume** **4.3cm³**
- **UL Approval** **MH28122**

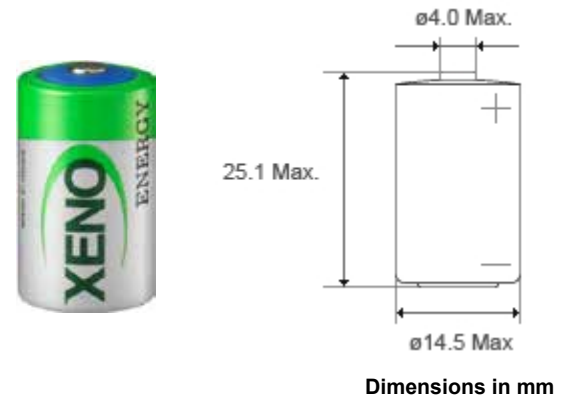


Available Terminal Type

STD, T1, T2, T3, T3/R, T3EU, T3EU/R, AX


Storage Condition

Please store batteries at clean, cool (not over +30°C), dried (less than 30% RH) and ventilated condition

Discharge Characteristics at +85°C

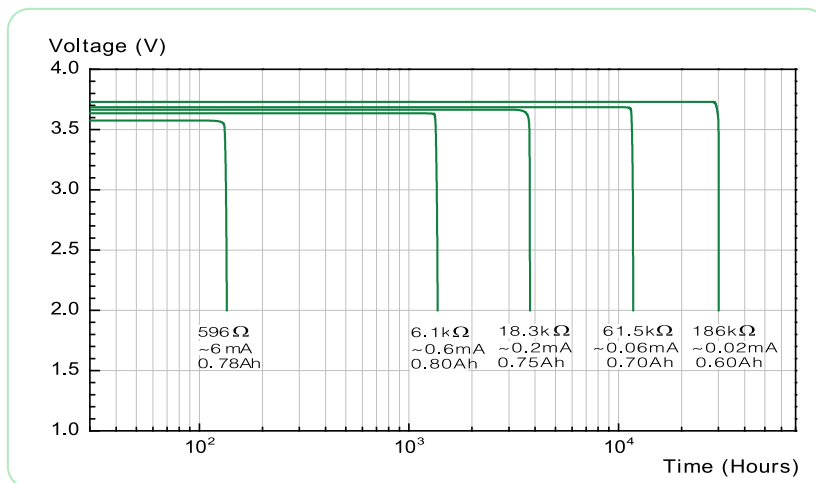

Capacity versus Current

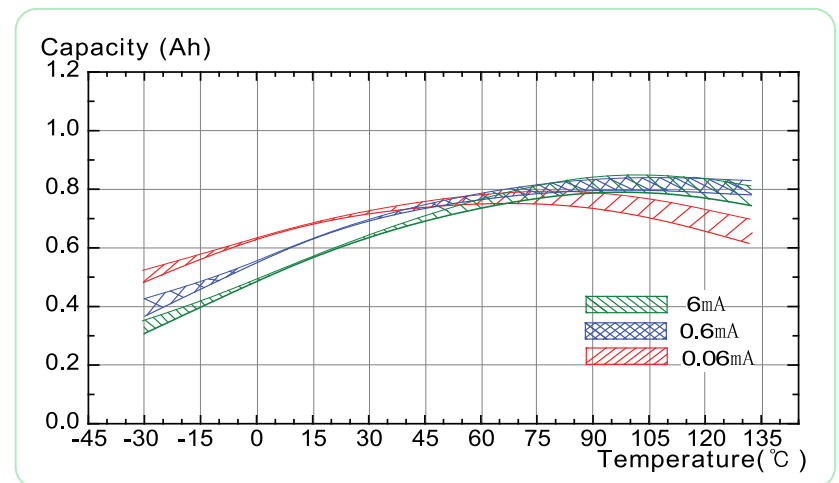

Operating Voltage

